


WIRELESS ROUTER SETUP GUIDE

TOTOLINK
A3002RU-V2




 <http://totolink.net/>



STEP
1




Plug one end of your ethernet / LAN cable in to one of the LAN (orange) ports at the back of the router

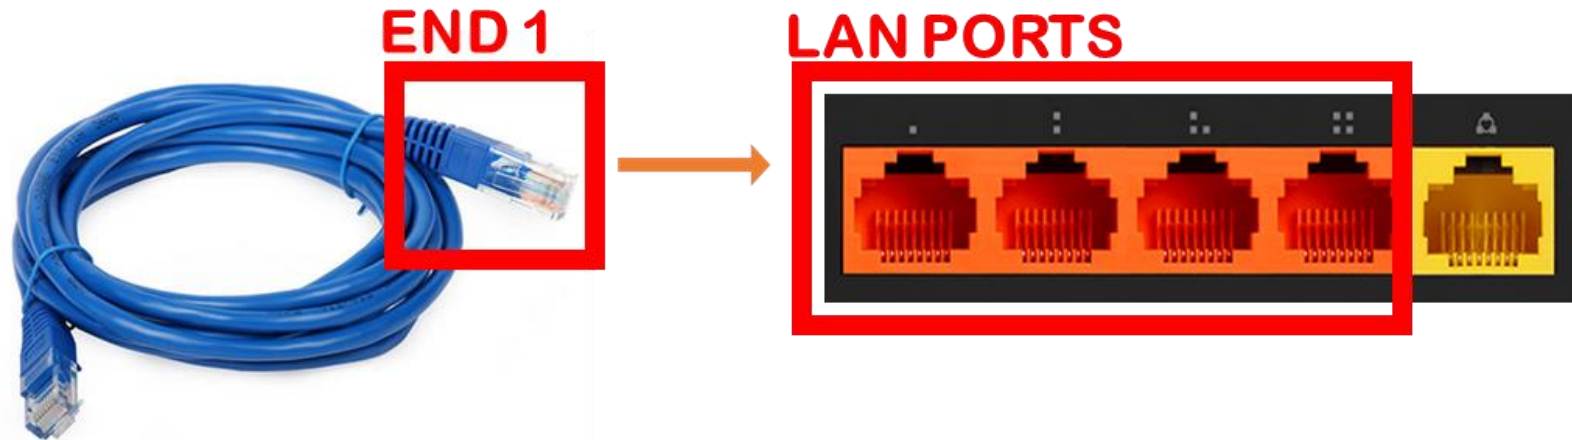

Please Note: Colour Of Cable May Vary

STEP
2


Plug the other end of the ethernet / LAN cable into the LAN port in your computer

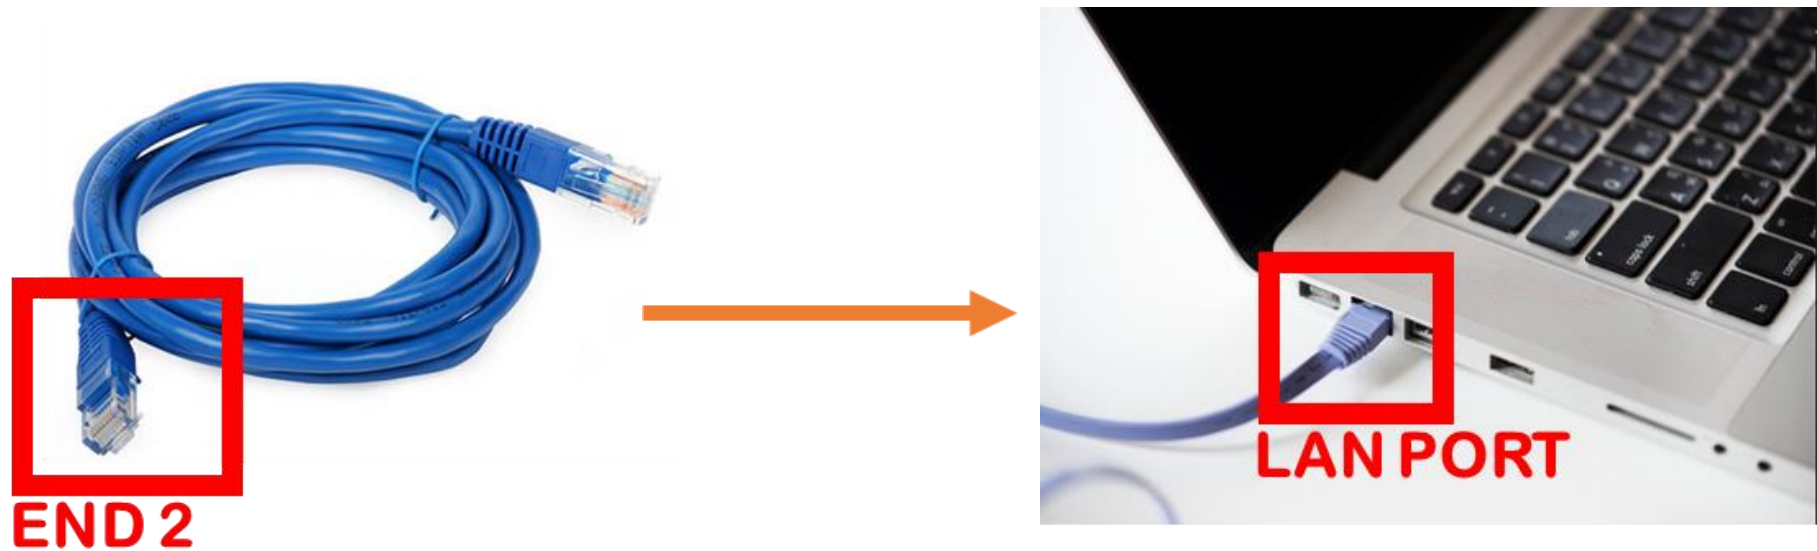

STEP
3



Open your web browser and type in the router IP address into the URL

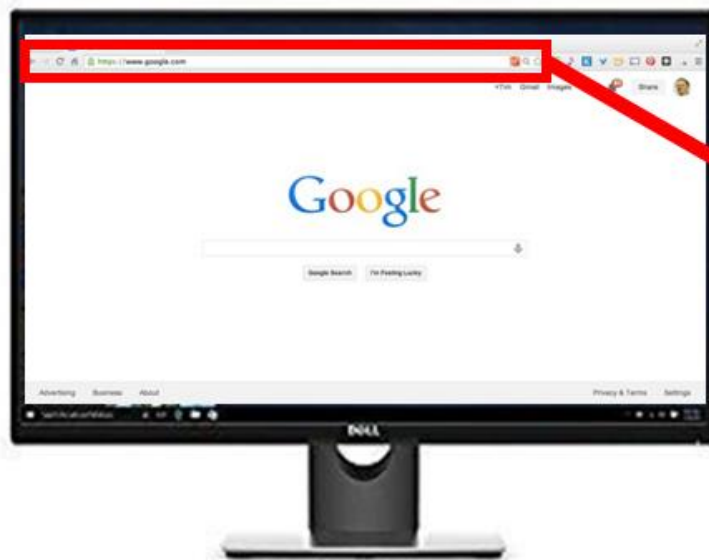

**ROUTER IP ADDRESS:
192.168.0.1**


* Please be sure not to Google the IP address, but type it into the URL as shown

STEP 4

Enter default username & password

STEP 4.1

New Login Password

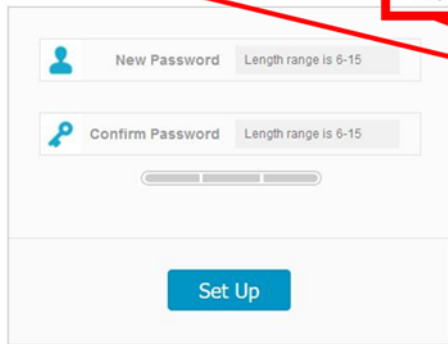

The form contains two input fields: "New Password" and "Confirm Password", both with a "Length range is 6-15" label. A "Skip" button is located at the top right of the form area. A "Set Up" button is at the bottom.


Skip

The "New Login Password" window will appear. Click on "Skip"

Note: Set a new login password to prevent the router from being compromised

STEP 4.2

USER LOGIN

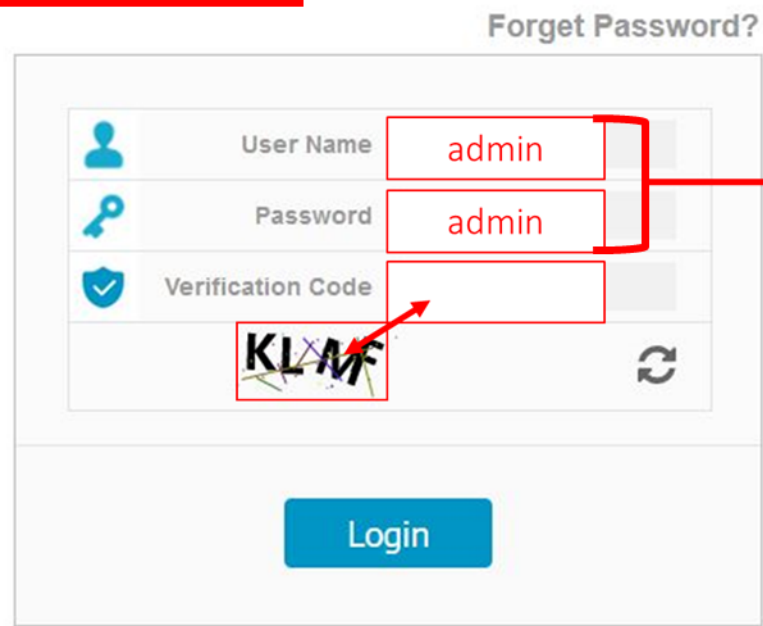

The form is titled "USER LOGIN" and includes a "Forget Password?" link. It contains three input fields: "User Name" (containing "admin"), "Password" (containing "admin"), and "Verification Code" (containing a CAPTCHA "KLMF"). A "Login" button is at the bottom.

The "USER LOGIN" window can now be seen. The User Name and Passwords are: admin (lowercase)

STEP 5



You will now be on the EASY SET UP window:

Easy Setup

The easy setup will guide you to configure AP for first time.

Advanced Setup

Change from Gateway to AP Mode

The Smartest Network Device

Gateway | Advanced Setup | Auto

Easy Setup

Quickly configure the router to access the Internet.

Connect Status
Connect Status: DHCP Disconnected

Internet
WAN Access Type: DHCP Client | Auto Detect

SSID 5GHz
SSID: TOTOLINK_A3002RU_5G
Password: (length range is 8-63)

SSID 2.4GHz
SSID: TOTOLINK_A3002RU
Password: (length range is 8-63)

IPTV
IPTV MODE: Disabled

Apply | Refresh

Gateway

Click on the drop-down arrow and
select "AP Mode"

AP Mode

STEP 6



You will now be on the Easy Setup AP MODE window:

AP Mode

Easy Setup
Extend your existing wireless coverage by relaying wireless signal.

You now have the option to change your Network Name (SSID) and password to what you would prefer

IMPORTANT:
CLICK "APPLY" WHEN
DONE TO SAVE
CHANGES

Wi-Fi 5GHz

Wireless Network 5GHz Enabled

SSID

Password (length range is 8-63)

Wi-Fi 2.4GHz

Wireless Network 2.4GHz Enabled

SSID

Password (length range is 8-63)

Wi-Fi 5GHz

Wireless Network 5GHz Enabled

SSID

Password

Wi-Fi 2.4GHz

Wireless Network 2.4GHz Enabled

SSID

Password